

HTP3F CE

Electrical heating tape for the heating of moderately long pipelines

LONGLINE High Efficiency Series Resistance Three Phase Heating Tape

- Circuit lengths up to 2km
- Single supply point – minimises supply cabling costs
- High efficiency, flat and flexible
- Power outputs up to 23W/m
- Easy installation in convenient lengths

APPLICATIONS

LONGLINE HTP3F is a series resistance, three phase constant power heating tape used for freeze protection or process temperature maintenance of moderately long pipelines, eg. up to 2km.

A typical application is the freeze protection of above ground water pipelines.

MINIMAL SUPPLY / DISTRIBUTION COSTS

LONGLINE minimises the number of electrical supplies needed and so minimises supply cabling / distribution equipment costs. Circuits are often fed at the pipe ends only.

FEATURES

Construction

The thermoplastic insulated conductors are sheathed with thermoplastic for flexibility.

A copper braid and overjacket can be provided for additional mechanical protection or for grounding purposes.

The Design

Heating conductors are sized to produce the desired heat output for the circuit length required. The LONGLINE heaters are connected directly to the 3 phase mains voltage or, when required, to a step-up transformer.


Improved Safety and Efficiency

The large heated surface of LONGLINE's flat foil construction results in lower operating temperatures than equivalent round conductor constructions thereby improving safety and system life. The high efficiency produces high power capability (up to 23W/m).

Installation

LONGLINE cable may be straight run or spiralled to above ground pipes. For buried lines, cables are usually drawn into channel raceways within a pre-insulated pipeline system.

Cable is provided in convenient lengths, eg. 200m for series connection at site.

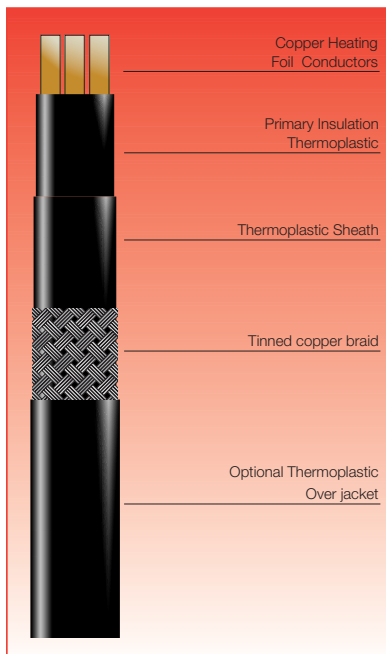

LONGLINE A COMPLETE SYSTEM

Reliability of the heating system is usually paramount. LONGLINE cables form only part of a high integrity LONGLINE heating system including power control, temperature control and circuit health monitoring/alarm equipment – all specifically developed and produced by Heat Trace Ltd.

SPECIFICATION

MAXIMUM TEMPERATURE	Un-energised	125°C (257°F)
----------------------------	--------------	---------------

MINIMUM INSTALLATION TEMPERATURE		-40°C (-40°F)
---	--	---------------

POWER SUPPLY	up to 600V 3 phase according to design requirements	
---------------------	---	--

POWER OUTPUT	up to 23W/m by design according to application requirements	
---------------------	---	--

HEATING CONDUCTOR THICKNESSES (4mm WIDE)	0.3mm	0.7mm
	0.4mm	0.8mm
	0.5mm	1.00mm
	0.6mm	1.25mm

Please note that Heat Trace will size conductors to provide the required W/m output for required circuit length.

DIMENSIONS	Type	Nom. Dims (mm)
	Ref	
	HTP3F	24 x 6
	HTP3F-C	25 x 7
	HTP3F-CT	27 x 9

CONSTRUCTION

Heating Conductors	Copper 4mm wide
Primary Insulation Sheath	Thermoplastic
Braid (optional)	Thermoplastic
Over Jacket (optional)	Tinned Copper
	Thermoplastic

ORDERING INFORMATION

Example	HTP3F-CT/1.0
Thermoplastic Sheath	_____
Three heating conductors	_____
Tinned Copper Braid	_____
Thermoplastic over jacket	_____
Conductor Thickness (mm)	_____

MAXIMUM PIPE/WORKPIECE TEMPERATURE

The surface of the heater must not exceed the maximum withstand temperature of its constructional materials or the Temperature Classification (if installed in a hazardous area). This is ensured by limiting the pipe or workpiece temperature to a safe level either by design calculation (a Stabilised Design) or by means of temperature controls.

For worst case conditions, the temperature of steel pipes should be limited to the following levels.

MAXIMUM PIPE/WORKPIECE TEMPERATURE (°C)


HEATER NOMINAL OUTPUT (W/m)	MAXIMUM PERMISSIBLE PIPE TEMP (°C)		
	HTP3F	HTP3F-C	HTP3F-CT
10	112	109	100
15	94	95	85
23	78	80	70

For conditions other than worst case, or pipes of other materials (eg. Plastic, Stainless Steel, etc.), consult Heat Trace.

Tolerances : Voltage +10%; Resistance ±10%

Pipe temperatures much higher than those given above may be accommodated by using Heat Trace Ltd voltage compensating devices eg. POWERMATCH™ – call for further details.

TYPICAL ARRANGEMENT



CIRCUIT PROTECTION

Circuit breakers, switch gear and supply cabling should be sized to cater for cold start-up conditions. Heat Trace Ltd will advise operating and start-up loads.

ACCESSORIES

Heat Trace supply and complete range of accessories including termination/splice kits, end seals, junction boxes, controls and fixing tape. When used in hazardous areas, only use approved components.

HEAT TRACE™
SETTING THE STANDARDS. LEADING THE WAY.

The information given herein, including drawings, illustrations and schematics (which are intended for illustration purposes only), is believed to be reliable. However, Heat Trace Ltd makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Users of Heat Trace Ltd products should make their own evaluation to determine the suitability of each such product for specific applications. In no way will Heat Trace Ltd be liable for any damages arising out of the misuse, resale or use of the product.

HANEL ul. Lagodna 11, Mała Nieszawka, 87-103 Toruń 5
tel./fax +48 56 678 71 27, mobile: +48 601 92 55 96, www.kablegrzejne.eu